




Vacuum pumps - Vakuumpumpen - Pompes à vide - Bombas de vacío

GV 40-60 (50 Hz: 40-60 m³/h - 23.5-35.3 cfm & 60 Hz: 48-75 m³/h - 28.3-44.1 cfm)

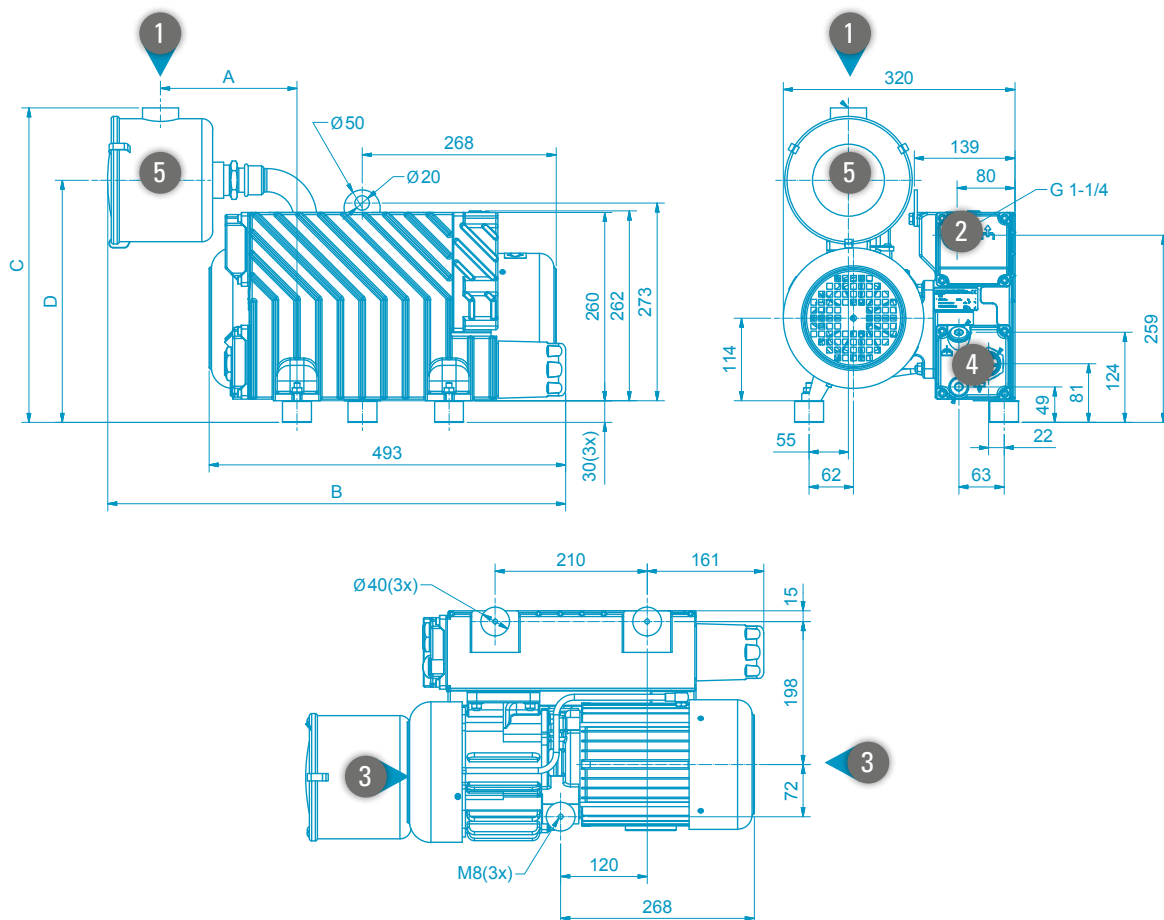


	EN	DE	FR	ES
1	Inlet connection	Eintritt Verbindung	Connexion d'entrée	Conexión de entrada
2	Discharge connection	Austritt Verbindung	Refoulement	Conexión de descarga
3	Cooling air entry	Eingang von Kühlluft	Entrée d'air de refroidissement	Entrada de aire de refrigeración
4	Oil service block	Öl-Service-Block	Bloc de service d'huile	Bloque de aceite de servicio
5	Inlet filter	Einlassfilter	Filtre d'entrée	Filtro de entrada

DIMENSIONS - DIMENSIONEN - DIMENSIONS - DIMENSIONES

	A	B	C	D
GV 40	189	633	435	335
GV 60	228	689	461	361

PUMPING SPEED - SAUGVERMOGEN - DEBIT - CAUDAL NOMINAL

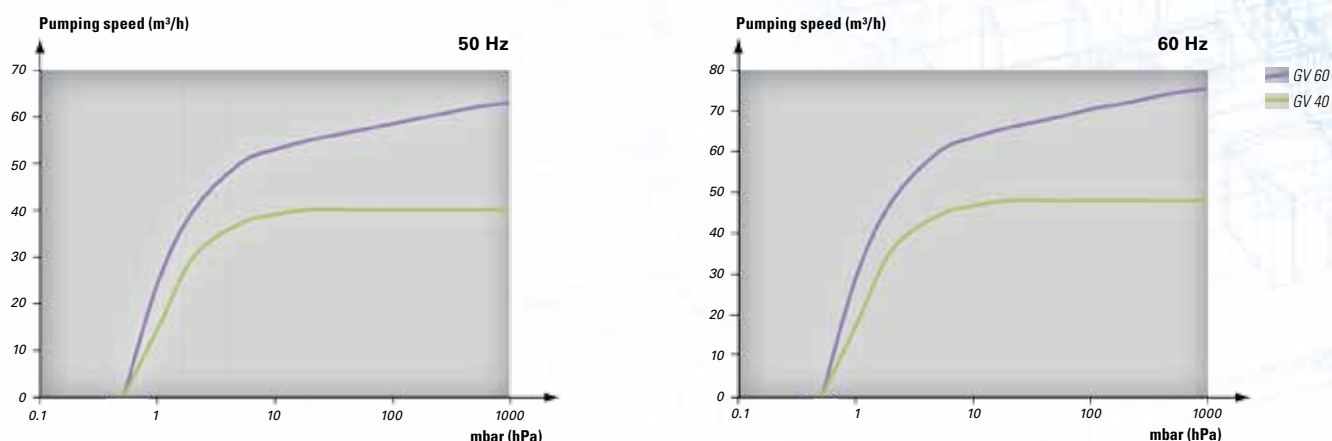

Pump performance measured at the inlet pressure and 20°C. Accuracy is +/- 10%.
 Pumpleistung am Einlaß Druck und 20°C gemessen. Die Genauigkeit beträgt +/- 10%.
 Performance de la pompe est mesurée à la pression d'entrée et 20 °C. La précision est de +/- 10 %.
 Rendimiento de la bomba se mide a la presión de entrada y 20° C. La precisión es de +/- 10%.

TECHNICAL DATA - TECHNISCHE DATEN - SPÉCIFICATIONS TECHNIQUES ESPECIFICACIONES TÉCNICAS

EN	Pumping speed		Ultimate pressure		Continuous operating pressure range		Oil capacity (min-max)		Oil type	Noise level	Admissible ambient temperature range		Nominal motor speed	Weight (1PH/3PH)		Motor power		Voltage range	
DE	Saugvermögen		Enddruck		Dauerbetriebsdruck		Ölmenge (min-max)		Öltyp	Schall-druck-pegel	Umgebungs-temperatur		Drehzahl	Gewicht (1PH/3PH)		Motorleistung		Spannungsbereich	
FR	Debit		Pression limite		Pression continue		Charge d'huile (min-max)		Type d'huile	Niveau sonore	Température ambiante		Vitesse rotation	Poids (1PH/3PH)		Puissance de moteur		Plage de tension	
ES	Caudal nominal		Presión final		Presión continua		Carga aceite (min-max)		Tipo aceite	Nivel sonoro	Temperatura ambiente		Velocidad del motor	Peso (1PH/3PH)		Potencia del motor		Rango de tensión	
	m³/h	cfm	mbar (hPa)	Torr	mbar (hPa)	Torr	l	qt		dB(A)	°C	°F	rpm	kg	lbs	kW	hp	V	
																		1PH	3PH
50/60 Hz																			
GV 40	40/48	23.5/28.3	0.5	0.4	0.5-400	0.4-300	1.0-1.5	1.06-1.59	ISO VG68	66/68	12-40	54-104	1400/1700	51.2/45.2	112.9/99.6	1.1/1.35	1.5/1.8	230	50 Hz: 175-260, 300-450 & 60 Hz: 200-300, 346-520
GV 60	60/75	35.3/44.1								68/70				52.0/46.5	114.6/102.5				



Atlas Copco



www.atlascopco.com/vacuum